


SIMPLE SUPPORT BRACKET FAMILY



Direct-to-Stud



Between Studs

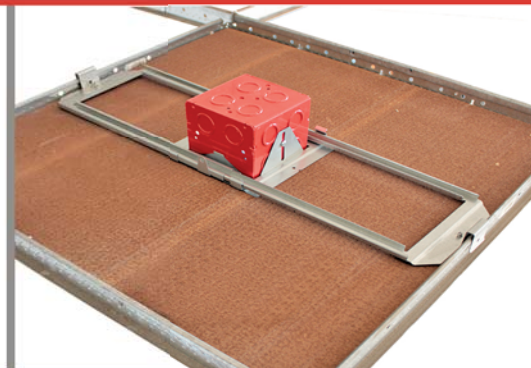


Ceiling T-Bar



Multi-Gang



Ceiling Hard Lid

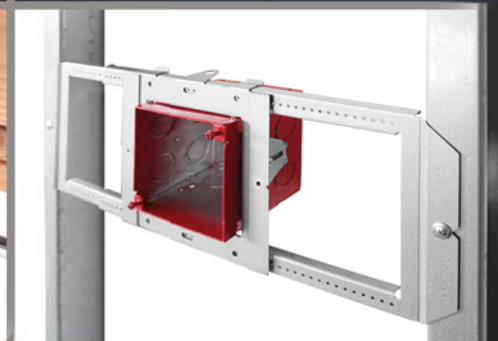

Fire Alarm

MEET THE SIMPLE SUPPORT BRACKET FAMILY

THE MOST VERSATILE SOLUTION FOR JUNCTION BOX INSTALLATION

SIMPLE SUPPORT BRACKET (SSB)

PRODUCT FEATURES

- Telescoping bracket adjusts from 15" to 25"
- SSB-T5 accepts 4", 4-11/16" & 5" Sq. Boxes, and must be paired with UMA-LVBS to mount 5" Sq. Boxes
- SSB-TBAR & SSBT-4R include clips for T-bar drop ceiling installation
- UMA or UMA-LVBS can either mount-to-stud directly or snap onto bracket
- SSB's rigidity eliminates need for far-side back support
- SSB's expand without removing adapters or junction boxes (ideal for prefabrication)
- Compatible with Adjustable Rings
- Must be used with boxes 2-1/8" deep or deeper
- UMAB, FA-UMAB, UMAB-4R & SSBT-4R: box adjusts from flush to 1-1/2"

NOTE

SSB, SSB-T5 & SSB-TBAR must be accompanied with either UMA or UMA-LVBS to mount a junction box. UMAB's also snap onto SSB brackets.

Cat. No.	Description	Std. Pkg.
SSB	Simple Support Bracket adjusts from 15" to 25" for mounting ONLY 4" & 4-11/16" boxes between studs	25
SSB-T5	Simple Support Bracket adjusts from 15" to 25" for mounting 4", 4-11/16" & 5 Sq. boxes between studs	25
SSB-TBAR	SSB with T-bar Drop Ceiling Mounting Clips	20
UMA	Universal Mounting Adapter for 4" and 4-11/16" Boxes to mount to SSB, SSB-T5, SSB-TBAR and directly to stud	25
UMA-LVBS	Universal Mounting Adapter w/ Back Support, Allows for 4", 4-11/16" & 5" Sq. Boxes to be Stud Mounted or Snapped onto SSB, SSB-T5, SSB-TBAR	25
FS-456-EXT <small>NEW!</small>	Far-side Support Extender for up to 6" Studs, Compatible with UMA-LVBS, tool-less	50
UMAB	4" Square, 3-1/2" Deep Box, 46 Cu. In., Adj. Up to 1-1/2". Adapter Included	10
FA-UMAB	Red 4" Square, 3-1/2" Deep Box, 46 Cu. In., Adj. Up to 1-1/2". Adapter Included	10
UMAB-4R <small>NEW!</small>	4" (40), 2-1/8" Deep Box w/ 10" PT, 21.1 Cu. In., Adj. Up to 1-1/2". Adapter Included	20
LVSB1	Low Voltage Stud Mounting Bracket 1-Gang, 1/2" raise	50
LVSB2	Low Voltage Stud Mounting Bracket 2-Gang, 1/2" raise	25
SSB-4S-MKO	Preassembled Simple Support Bracket w/ UMA & 4SDB-MKO-PT-10	12
SSB-5S-MKO	Preassembled Simple Support Bracket w/ UMA & 5SDB-MKO-PT-10	12
SSB-T5B-200 <small>NEW!</small>	Preassembled SSB-T5 with UMA-LVBS, T5B-200 (2" KO faces up) & T5R, Compatible with 4" Rings	10
SSBT-4R <small>NEW!</small>	Preassembled SSB-TBAR with UMAB-4R	20
BMCS <small>NEW!</small>	Box Mounted Conduit/Cable Support	50
BMCS-CJ6 <small>NEW!</small>	Box Mounted Conduit/Cable Support w/ CS-CJ6 installed	50

*SSB-4S replaced by SSB-4S-MKO



SSB



SSB-T5



SSB-TBAR



UMA



UMA-LVBS



FS-456-EXT


NEW!



UMAB



FA-UMAB



UMAB-4R

NEW!



LVSB1



LVSB2



SSB-4S-MKO
SSB-5S-MKO



SSB-T5B-200

EC&M Product of the Year 2020 Category Winner

NEW!



SSBT-4R

NEW!



BMCS

EC&M Product of the Year 2020 Category Winner



BMCS-CJ6

NEW!







PATENTED



**Video Available
On Our Website!**

DIRECT-TO-STUD

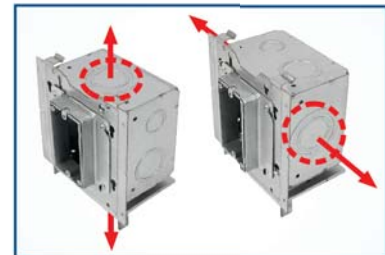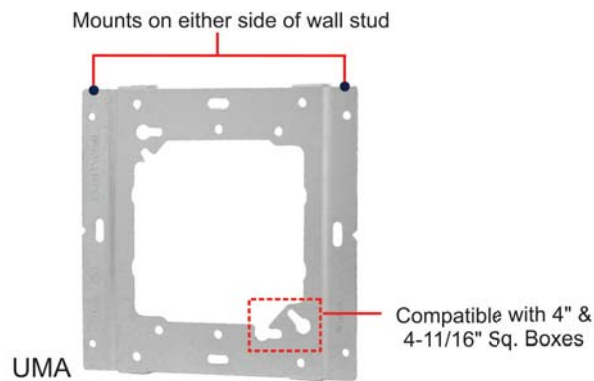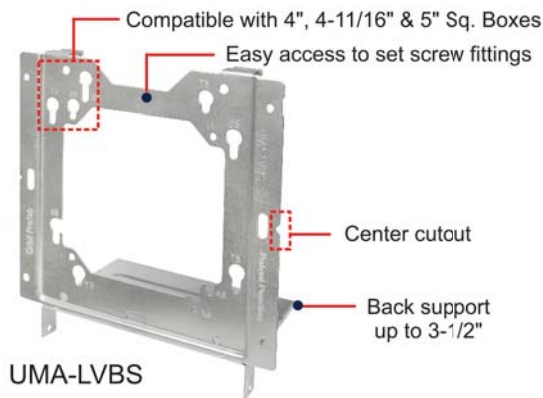

Both adapters easily SNAP ONTO SSB, SSB-T5 & SSB-TBAR

Mount UMA-LVBS direct to open or closed sides of wall stud

Turn any 4", 4-11/16" and 5" Sq. Box 90° with UMA-LVBS



UMA-LVBS provides up to 3-1/2" far-side support

Fold FS-456-EXT onto UMA-LVBS for up to 6" far-side support

PROFAB
ENGINEERED ELECTRICAL SYSTEMS

Allow Orbit's PROFAB Division to build your ready-to-install assemblies. LVBS Assemblies mount direct-to-stud or snap onto the SSB or SSB-T5 brackets for between stud applications.



LVBS-4-158



LVBS-4-A258

ITEM #	NO. OF GANGS	RING DEPTH	Box Styles & Options
LVBS-4-158	1	5/8"	BRACKET UMA-LVBS
LVBS-4-258	2	5/8"	
LVBS-4-175	1	3/4"	BOX Use "4" for 4SDB-MKO (4" sq.) w/ 10" PT Use "5" for 5SDB-MKO (4-11/16" sq.) w/ 10" PT Use "T5" for T5B-200 (5" sq.)
LVBS-4-275	2	3/4"	
LVBS-4-A158	1	5/8" - 1-1/4"	ADD-ONS Add "-FS" to include 2-hour rated Fireblok™ UFSI Insert Add "-CS" to include BMCS Add "-CS6" to include BMCS-CJ6
LVBS-4-A134	1	3/4" - 1-1/2"	
LVBS-4-A258	2	5/8" - 1-1/2"	

Assemblies are built to order. Please allow for a short lead time.

Don't see what you're looking for? Email info@orbitprofab.com for more custom assemblies!



PATENTED



Video Available
On Our Website!

FIRE ALARM & LIGHTING

DIRECT-TO OR BETWEEN STUDS



FA-UMAB



UMAB



UMAB-4R

NEW!



Video Available
On Our Website!



DIRECT-TO-STUD

Guided-slots on each side allow the box to be easily adjusted by simply loosening the screws

BETWEEN STUDS

FA-UMAB and UMAB-4R snap onto any of the SSB Brackets

CEILING APPLICATIONS



SSB




SSB-TBAR


Includes clips for between T-bar drop ceiling grids



NEW! SSBT-4R

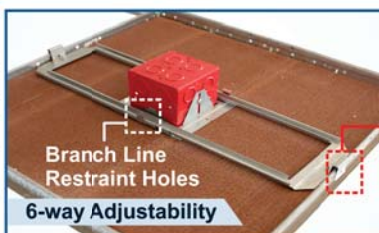

Branch Line Restraint Holes



FIRE ALARM/LIGHTING ON HARD LID

FA-UMAB and UMAB-4R can be installed on SSB for Hard-Lid Ceiling Applications

FIRE ALARM ON T-BAR

SSB-TBAR with FA-UMAB Installed in Drop Ceiling Grid

Tek screw provisions on each clip comply with NEC 314.23 (D) (1)



SSBT-4R ON T-BAR

SSBT-4R Installed in Drop Ceiling w/ Branch Line Restraint




PATENTED

BETWEEN STUDS

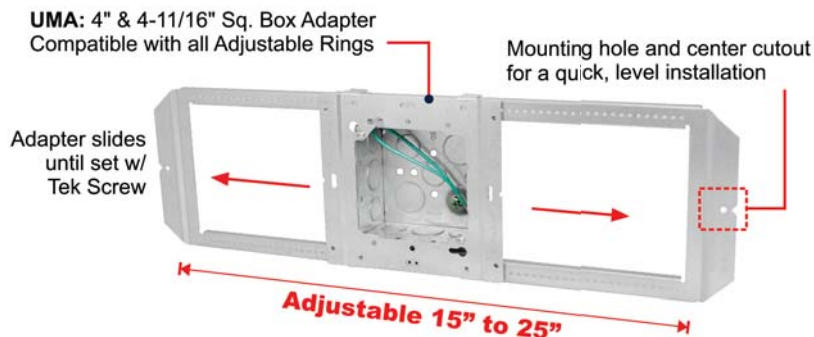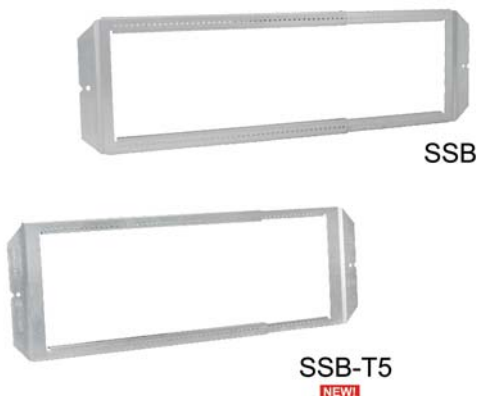


Order preassembled with box and 10" pigtail as
SSB-4S-MKO or SSB-5S-MKO

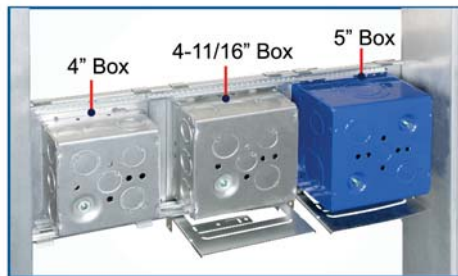


ANY SIZE J-BOX

SSB-T5 fits up to three 4", 4-11/16" or 5" boxes
between 24" studs

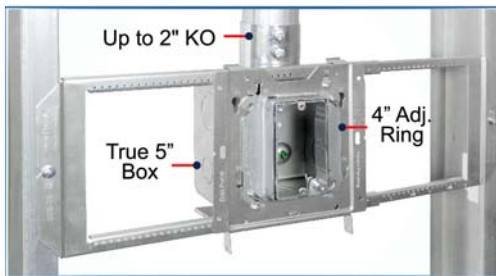

SSB-T5 INSTALLED

Accepts boxes with up to 2" K.O.



POWER + DATA

Use LVSB1 or 2 for Low Voltage
applications that do not
require a junction box

PROFAB
ENGINEERED ELECTRICAL SYSTEMS

Allow Orbit's PROFAB Division to build your ready-to-install assemblies.
SSB Assemblies are fully adjustable as the bracket expands from 15" - 25"
and the box can slide left/right until finally set with a Tek Screw.



ITEM #	NO. OF GANGS	RING DEPTH	Box Styles & Options
SSB-4-158	1	5/8"	BRACKET SSB + UMA or SSB-T5 + UMA-LVBS (for T5 Boxes)
SSB-4-258	2	5/8"	
SSB-4-175	1	3/4"	BOX Use "4" for 4SDB-MKO (4" sq.) w/ 10" PT Use "5" for 5SDB-MKO (4-11/16" sq.) w/ 10" PT Use "T5" for T5B-200 (5" sq.)
SSB-4-275	2	3/4"	
SSB-4-A158	1	5/8" - 1-1/4"	ADD-ONS Add "-FS" to include 2-hour rated Fireblok™ UFSI Insert Add "-CS" to include BMCS Add "-CS6" to include BMCS-CJ6
SSB-4-A134	1	3/4" - 1-1/2"	
SSB-4-A258	2	5/8" - 1-1/2"	LOW VOLTAGE Add "-LV1" for LVSB1 "-LV2" for LVSB2



PATENTED

Assemblies are built to order. Please allow for a short lead time.

Don't see what you're looking for? Email info@orbitprofab.com for more custom assemblies!

MULTI-GANG BOXES ON SSB

PREASSEMBLED SSB WITH 3-1/2" DEEP MULTIGANG MASONRY BOX, UP TO 6-GANG, BOX DEPTH ADJUSTABLE FROM 1/2" TO 1-1/2"



SSB-MB3



6-way Adjustability



An ideal solution in Nurse Call systems and Headwall assemblies for healthcare projects



Adjustment Screws & Guided Slots

Adjustable 1/2" to 1-1/2"

SSB-MB3 SIDE VIEW

Cat. No.	No. of Gangs	KO Ends	KO Bottom	KO Sides	Cu. Inches	Std. Pkg.
SSB-MB3	3	(6) - CKO	(3) - CKO	(4) - CKO	69.3	10
SSB-MB4	4	(8) - CKO	(4) - CKO	(4) - CKO	92.1	10
SSB-MB5	5	(10) - CKO	(5) - CKO	(4) - CKO	116.1	10
SSB-MB6	6	(12) - CKO	(6) - CKO	(4) - CKO	139	10

FIRST MEANS OF SUPPORT

BOX MOUNTED CONDUIT/ CABLE SUPPORT

PRODUCT FEATURES

- No more field installed first means of support
- Attaches directly to any size junction box for a cost saving solution to first means of support needs.
- Satisfies NEC 330.30 (B)
- Eliminates the need for additional bar hangers in the field BMCS-CJ6 includes a CS-CJ6 for tool-less cable installation

Cat. No.	Description	Std. Pkg.
BMCS NEW!	Box Mounted Cable Support	50
BMCS-CJ6 NEW!	Box Mounted Cable Support with CS-CJ6 for tool-less installation	50
CS-CJ6	Stud Mounting Cable Support with locking tab	100



NEW! BMCS




NEW! BMCS-CJ6

EC&M
Product of the Year **20** YEARS
2020 Category Winner



CS-CJ6



TRADITIONAL METHOD



BMCS-CJ6 installed on SSB Bracket helps minimize the field work



Installed with just one Tek Screw



PATENTED